




iPC-WP will lead you to a water world

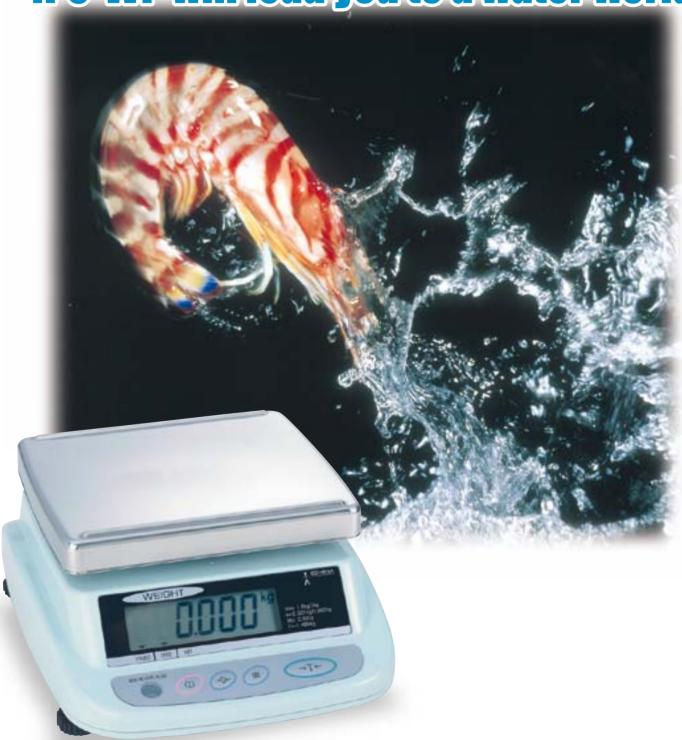

iPC-WP... Compact, Portable Scale for Washdown Environments

Durable Construction Equals Quality Performance

Meeting the demands of an IP-65 rating, Ishida's iPC-WP is protected from dust and low pressure water. The stainless steel platter is designed for ease, removal and frequent washing for food and chemical applications. The iPC-WP's sleek design is coupled with accuracy and user friendly operation.

Features

On the Go Convenience

Today's fast-moving business climate demands portable solutions. Quite simply your tools need to be where you are. That's precisely why we created the iPC-WP with both battery power and an AC adapter. When required, the iPC-WP is easy to move and instantly set up at remote locations such as farmers markets and roadside stands. Two D-cell batteries allow efficient, extended operation—as long as 500 hours, and an annunciator lets you know when to change them. The iPC-WP's selectable Auto Power Off function saves power and ensures long battery life.

Large Display & Accessible Buttons

The large 25mm LCD panel provides instant weight identification and the optional dual display is ideal for retail applications.




Specifications	
51	
Platter size	8.9" (W) x 7.6"(L)
Capacity and minimum graduation	Multi Interval
	6 lb/3 kg
	0.002 lb/0.001 kg from 0 to 3 lb /1.5 kg
	0.005 lb/0.002 kg from 3 lb/1.5 kg to 6 lb/3 kg 15 lb/6 kg
	0.005 lb/0.002 kg from 0 to 6 lb/3 kg
	e e
	0.01 lb/0.005 kg from 6 lb/3 kg to 15 lb/6 kg 30 lb/15 kg
	0.01 lb/0.005 kg from 0 to 15 lb/6 kg
	0.02 lb/0.01 kg from 15 lb/6 kg to 30 lb/15 kg
Weighing method	Strain guage load cell
LCD panel	Six digits (7-segment), character height 25 mm
Display information	6-digit weight, battery enunciator, decimal point, net weight enunciator, stability enunciator, minus sign, and unit of measurement
Power	2 Dry Cell D-Type batteries (up to 500 hours) or AC adapter (Dry Cell batteries and/or AC adapter are not included) Auto Power Off function (can be set to 60 min., 20 min., or off)
Operational temperature	-5°C ~ 40°C
Weight	3.2 kg (excluding batteries)
Approvals	OIML,CE comformity for approval type
Option	AC adapter

Dimensions

unit: inch







Design and specifications are subject to change without notice.





Sales & Service:

DESNA CONTROLS & WEIGHING INC. 412 Manitou Road SE, Calgary, AB T2G 4C4 Phone: 403-243-4848 sales@desnacontrols.com www.desnacontrols.com